
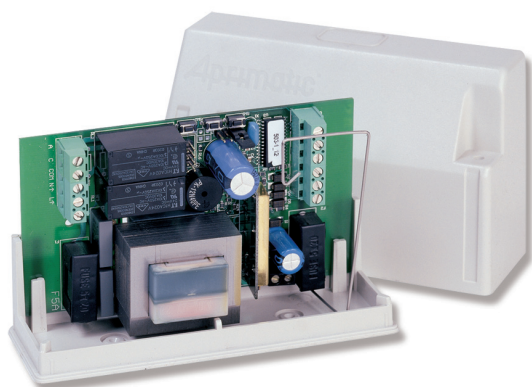


CE 130/CE 130F

Operator for rolling shutters.

CE 130 (reversible) for rolling shutters with 48/60 mm shafts and 220 mm spring holders is an economical version for quick and easy installation. An electric brake is available as an accessory.

CE 130F (non-reversible), thanks to its optional accessories, can be used with various types of rolling shutter with 48/60 mm shafts and 200/220 mm spring holders.

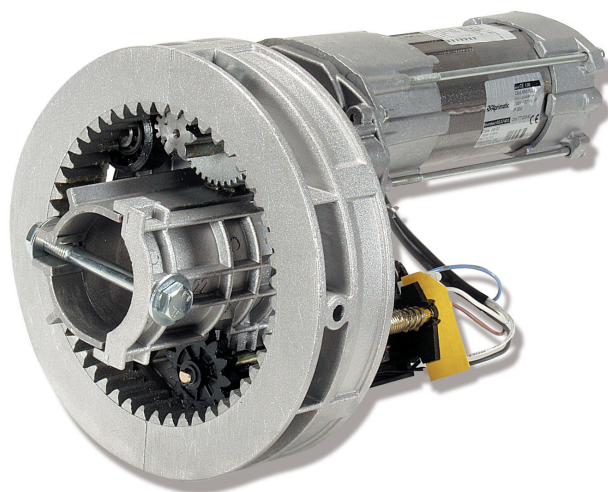

The M230S electronic control unit features an integrated receiver compatible with all Aprimatic 433.92 MHz remote controls, and is easy to install and configure. It can be connected to control, safety and security devices (max. accessory absorption: 300 mA) and comes with 4 logic systems for working and pause time control and programming.

Motor Technical Data

MAX TORQUE	140 Nm.
MAX DOOR WEIGHT	130 kg
RPM	10 n
CAPACITOR	16 μ F
VOLTAGE	230 V
CURRENT ABSORBED	2,6 A
MAX DOOR HEIGHT	6 m
POWER CABLE	NO
OPERATING TEMPERATURE	-10° C + 70° C